


SEAVIEW

ELEVATE YOUR ELECTRONICS

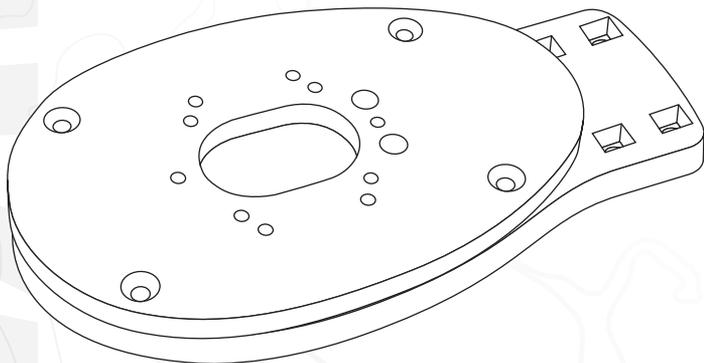

INSTALLATION INSTRUCTIONS


For Seaview Modular Top Plate:

ADA-F1


Refer to website for most up to
date instructions and videos.

WWW.SEAVIEWGLOBAL.COM


PARTS INCLUDED

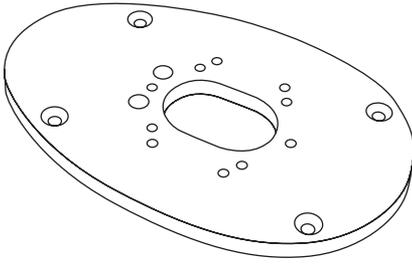

X1 ADA-FNM-2

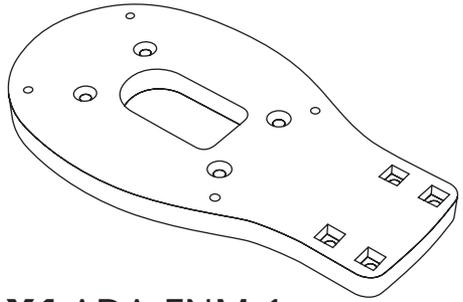

X1 ADA-FNM-1



X6



X4

5/16" - 18



X6

M6 x 16



X8

5/16" - 1 1/4"

TOOLS NEEDED




3/16" = 4.763mm




Sudbury Elastomeric Marine Sealant is recommended. To purchase call 800-655-7922 or visit www.seaviewglobal.com


- 1** Insert the four nuts into the ADA-FNM-1 adapter plate. Note that these nuts may have already been installed for you.

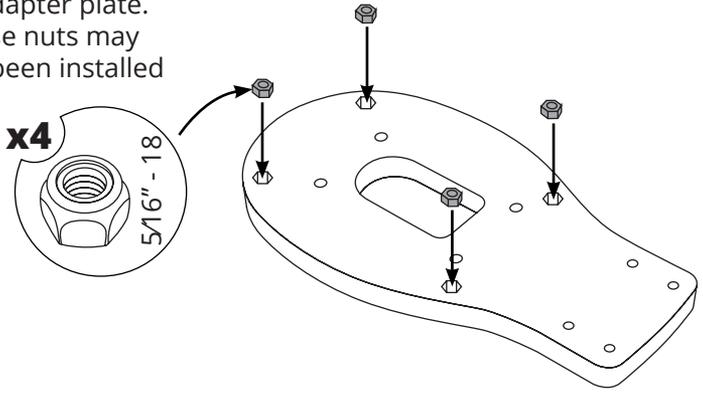


- 2** Place the rubber gasket into the groove on the top of the Seaview mount. Note, that the rubber gasket is included in the Seaview mount kit.

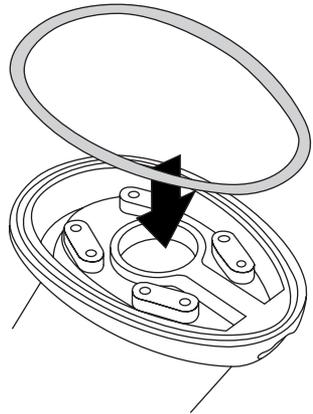


- 3** Place the ADA-FN-M1 on top of the mount, be sure to line up the four mounting holes.

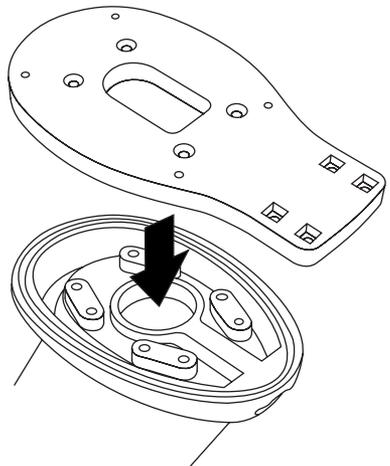


4 Bolt the ADA-FN-M1 down with four 5/16" - 1-1/4" bolts using an allen wrench.

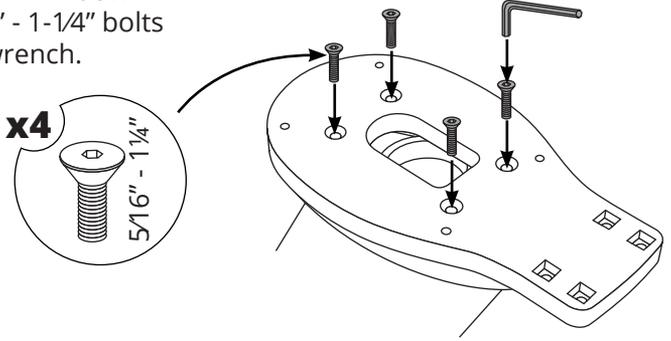


5 Place the camera on to the ADA-FN-M2 adapter plate.

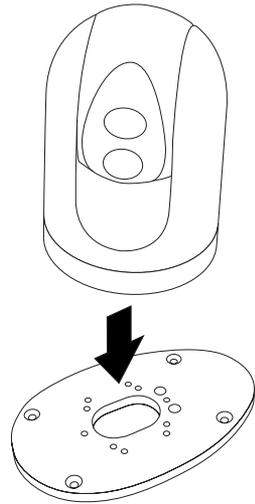


6 Place the camera on to the ADA-FN-M2 adapter plate.

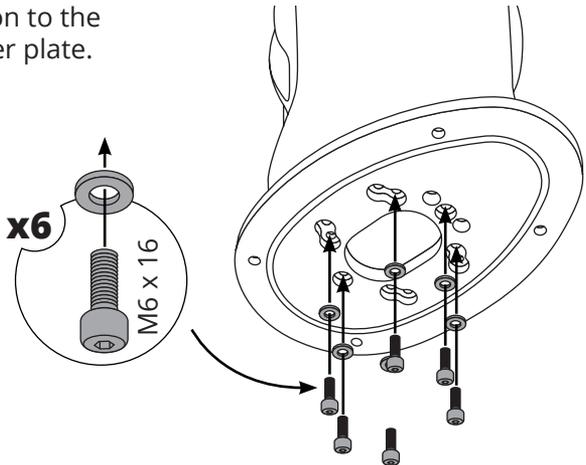

7 Apply marine adhesive sealant to the bottom of the ADA-FN-M2 adapter plate.

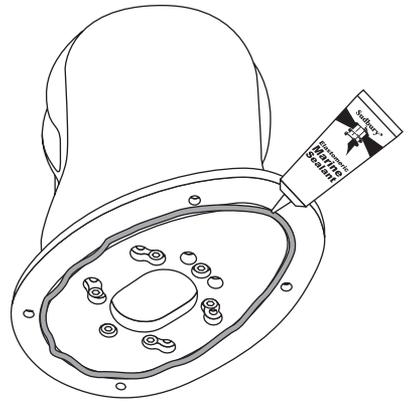


8 Apply marine adhesive sealant to the four bolt holes. Then bolt the ADA-FN-M2 plate down with four 5/16" - 1-1/4" bolts using a allen wrench.

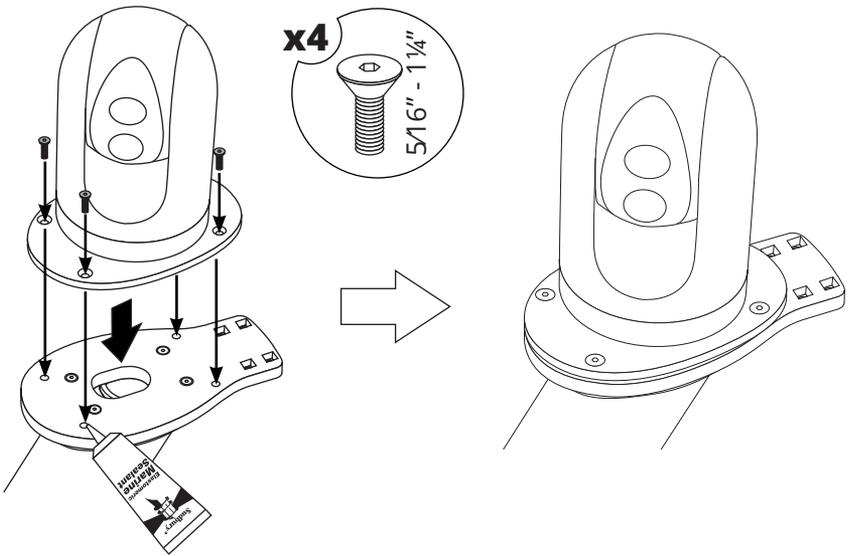

OPTIONAL ACCESSORIES


Call 800-655-7922 or visit www.seaviewglobal.com for available accessories.

LIGHT BARS



LTB-R


Fits closed dome radars.



LTB-S


Fits 20" or smaller satdomes.

LIGHT BAR TOPS



LTBP-1197

Perko 1197
incandescent
Light.




LTBA-7800

Attwood LED
Light.



LTBU1A1197


Light Bar Top
with Perko 1197
Light, can fit GPS.



LTBU1A800

Light Bar Top
with Attwood
LED Light, can fit
GPS.


SPREADER KIT



SP1-MOD


Allows user to mount GPS
units or antennas onto a
Seaview Modular Mount.

HINGES

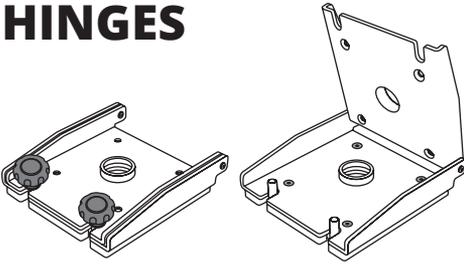


Seaview Hinge Adapters fold in any direction necessary for added height clearance.

WEDGES



Compensates for plane angle.
Available in 2, 4 or 6 degree wedges.

CABLE GLANDS

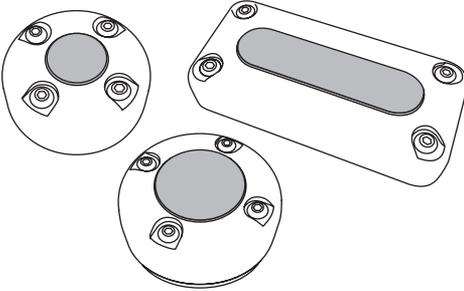

Seaview Cable Glands provide waterproof cable routing.

The background of the entire page is a light gray topographic map with white contour lines. The lines are irregular and wavy, representing terrain elevation. The map covers the entire page, with the text elements overlaid on it.

SEAVIEW///
ELEVATE YOUR ELECTRONICS

SEAVIEW///

Tel: 800-655-7922
www.seaviewglobal.com

EUROPEAN OFFICE

Tel: +33 4 94 53 27 70
www.seaviewprogress.com

4-010519