


SEAVIEW

ELEVATE YOUR ELECTRONICS

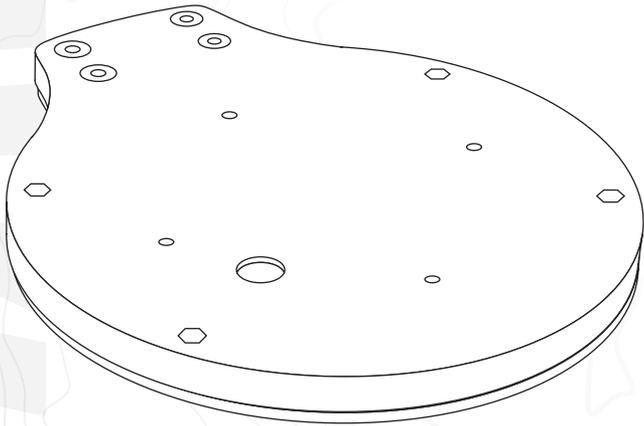

INSTALLATION INSTRUCTIONS

For Seaview Modular Top Plate:

ADA-S4

Refer to website for most up to
date instructions and videos.

WWW.SEAVIEWGLOBAL.COM

PARTS INCLUDED



X4
(14SB)




X4
(1420NUT)

1/4 - 20



X8
(CSWASHER)




X8
(516181FHCS)

5/16-18 x 1"



X4
(14201BHCS)


1/4 - 20 x 1"

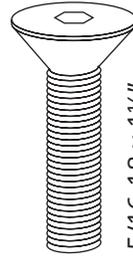


X4
(51618112FHCS)

5/16-18 x 1 1/2"


(these bolts may be needed if using a Seaview light bar)

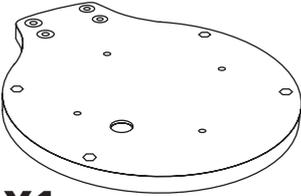

X1
(ADAM32A)

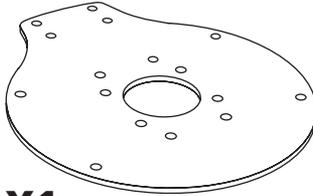


X1
(ADA15A)






X1
(PMGR02)

TOOLS NEEDED


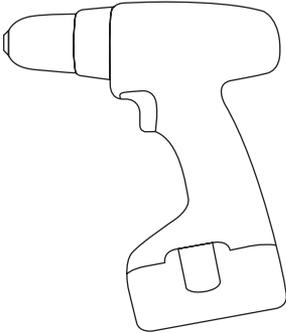


Sudbury Elastomeric Marine Sealant is recommended. To purchase call 800-655-7922 or visit www.seaviewglobal.com



1 Secure the lower adapter plate to the Seaview mount with the eight 5/16-18x1" bolts and nylon washers.


Make sure to use the provided modular top gasket provided prior to installing the top plate (refer to your modular mount instructions for the gasket).

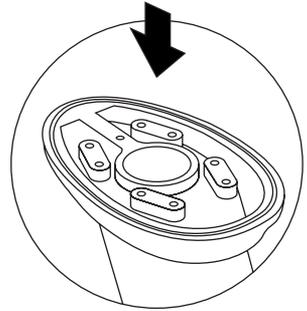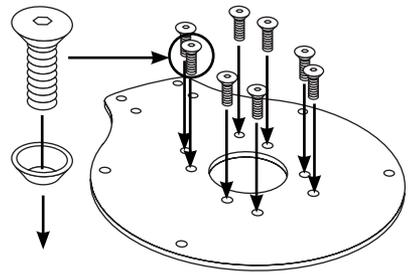

2 Insert the four nuts into the top adapter plate as shown (note this step may have already been done for you). Then insert the rubber grommet into the hole, making sure that the lip fits into the grommet.


TIP

Place the connector of the cable into a plastic bag. Apply Vaseline to the exterior of the plastic bag. Then try routing the connector/cable through the black rubber grommet.

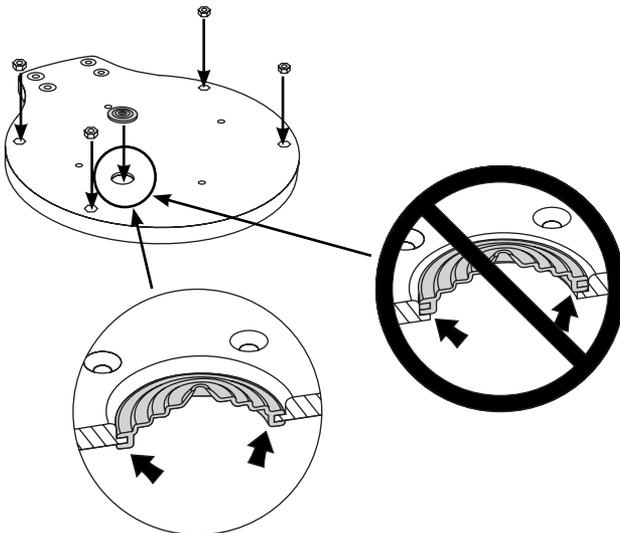


3

Bolt the dome to the top plate using electronic manufactures hardware recommendation.

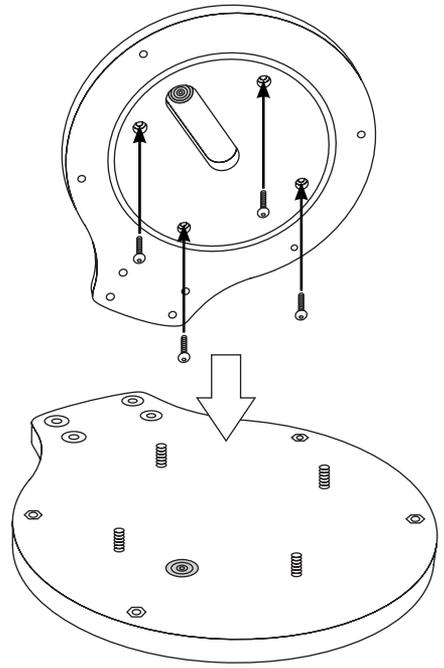


4

Attach the satellite dome to the adapter plate using electronic manufactures suggested hardware.

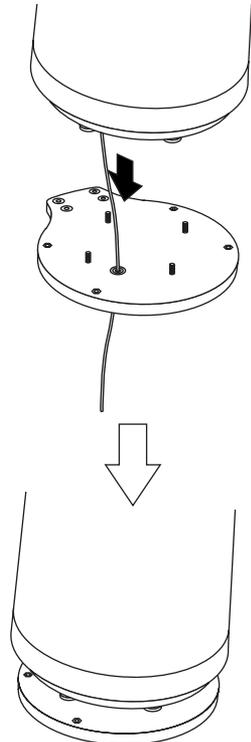


5 Apply marine adhesive sealant to the circular groove on the underside of the top adapter plate. Route the cables through the adapter plates and rubber grommet. Secure the adapter plates together with the four 1/4-20 x 1" bolts and nylon shoulder washers.

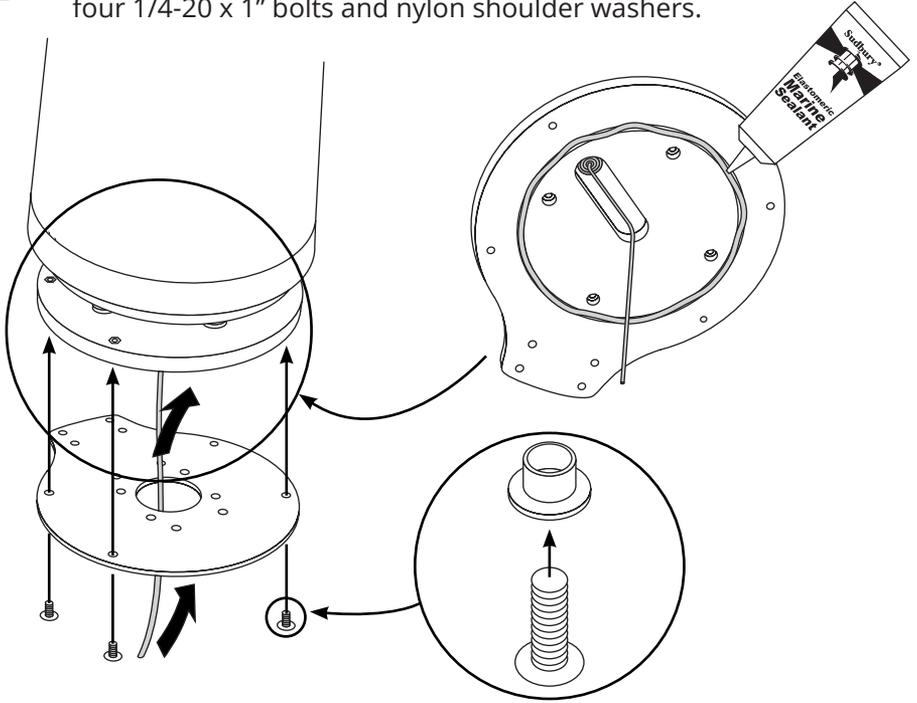

OPTIONAL ACCESSORIES


Call 800-655-7922 or visit www.seaviewglobal.com for available accessories.

LIGHT BARS

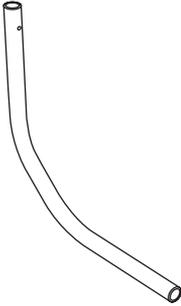

LTB-R


Fits closed dome radars.

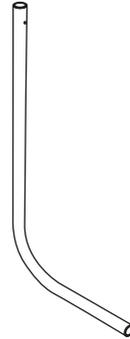

LTB-S


Fits 20" or smaller satdomes.

LIGHT BAR TOPS



LTBP-1197

Perko 1197 Light.




LTBAP1697

Perko 1697 LED light.



LTBU1A1197


Light Bar Top with Perko 1197 Light, can fit GPS.

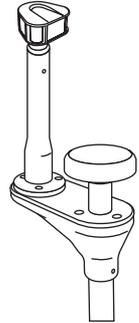

LTBU1A800

Light Bar Top with Attwood LED Light, can fit GPS.

SPREADER KIT

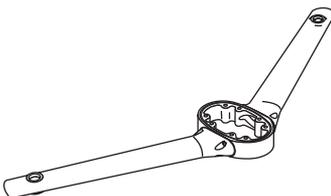

SP1-MOD

Allows user to mount GPS units or antennas onto a Seaview Modular Mount.

A background of a topographic map with contour lines, rendered in a light gray color. The map shows various landmasses and water bodies, with the lines indicating elevation changes.

SEAVIEW///
ELEVATE YOUR ELECTRONICS

SEAVIEW///

Tel: 800-655-7922
www.seaviewglobal.com

EUROPEAN OFFICE

Tel: +33 4 94 53 27 70
www.seaviewprogress.com

4-070722